




Flexible Cylinder Hose • 500 psi [34.5 bar]

designed for use with

3M™ Novec™ 1230 Fire Protection Fluid

Description

Flex hoses are used to connect the agent storage containers to the manifold in multiple cylinder arrangements. Flex hoses are 11" [280mm] long and constructed of high pressure hydraulic rubber in the 1" [25mm] and 1½" [40mm] sizes and stainless steel corrugated inner core with stainless steel braid in the 2½" [65mm] size. All sizes are fitted with a male NPT thread on both ends.

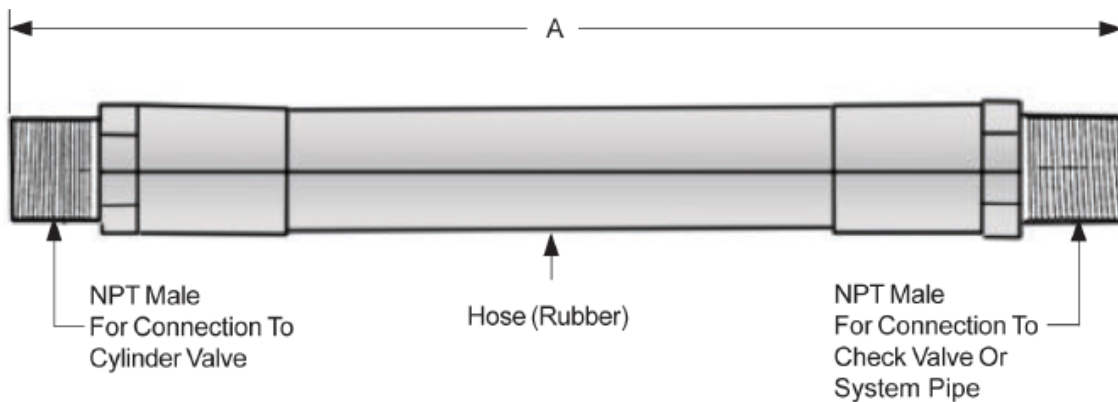

Part Number	Size	A	Material
FTF 701004	1" [25mm]	18" [457mm]	Rubber
FTF 701504	1 ½" [40mm]	18" [457mm]	Rubber
FTF 702502	2 ½" [65mm]	18" [457mm]	Braided
FTF 703002	3" [80mm]	18" [457mm]	Braided

Firetrace International