


MANUAL ACTUATOR HEAD 227DM

Description

This device adjusts on the top of the RGS-MAM-20/40/50/80 and RGS-MAM-11/12 container valve, activation port, or on the re-assembled electrical actuator 227SOL. It's a simple excentric lever (227DM) which activated manually the RGS-MAM-20/40/50/80 or RGS-MAM-11/12 valve in which it's mounted. In order to prevent that it does not activate accidentally, a security ring is added it must be removed before its activation.

It's activated by rotating 86° its handle with the hand as the figure shows (227DM).

Its assembled device to the cylinder valve by means of revolving nut, allows a correct direction of it. It is possible to be placed or to be cleared in the valve with the cylinder in load. The re-assembled is automatic.

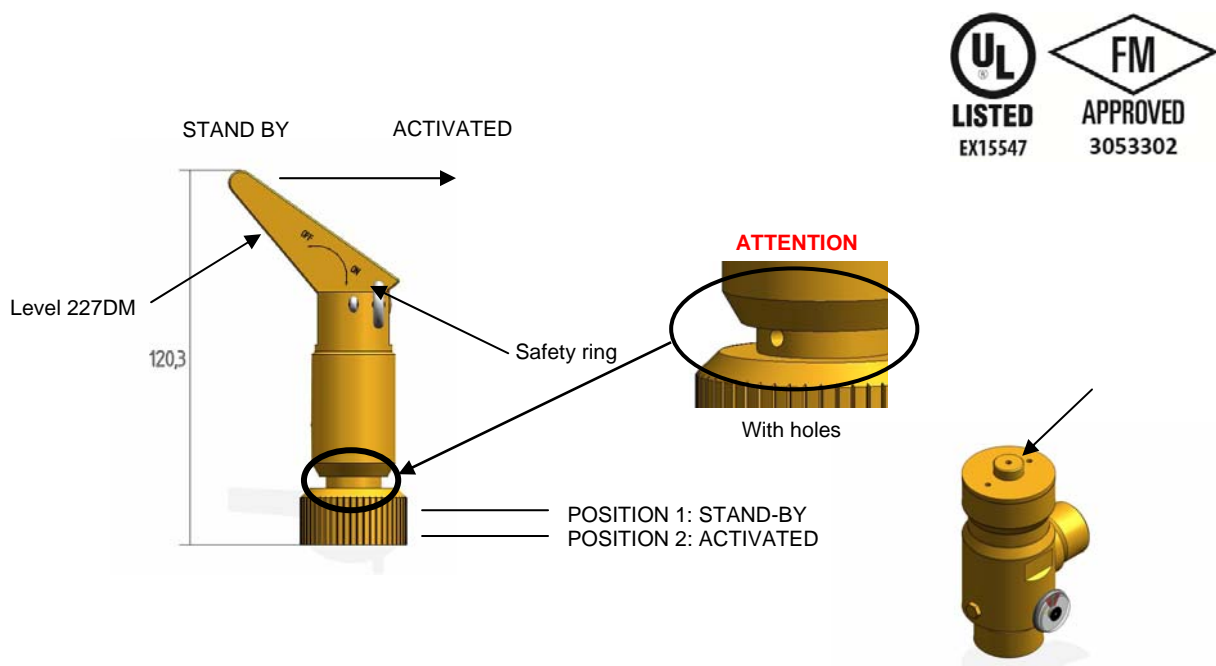

Technical information

MANUAL ACTUATOR HEAD 227DM	
Code	227DM
Re-assembled requirements	Manual (lever)
Connection to the container valve RGS-MAM-20/40/50/80 and RGS-MAM-11/12	3/4" BSP Female
Route of the lever to obtain the activation	86°
Approvals	UL-EX15547 FM-3053302

Safety:

Before threading the manual actuator to the activation port of the valve, check that the actuator pointer is retracted (position 1).

If the actuator pointer is in position 2, when threading the manual actuator, the gas extinguisher contained in the cylinder could discharge violently, causing serious injuries to the person handling it.

Do not install the manual actuator without holding the cylinder to the wall with its brackets.

REVOLVING NUT:

Thread it to the valve activation port or electrical actuator.

Do not add sealant, or teflon, or glue.

Tighten with the hand.

To remove the manual actuator from the valve, loosen its revolving nut by hand.

When doing this operation the valve cap must not be turned, as this will cause the contents of the cylinder to be discharged violently, which could cause serious injuries.

Do not remove the manual actuator unless the cylinder is attached to the wall by its brackets.

WARNING: This type of manual actuator head 227DM, is manufactured and approved to be used in fixed extinguishing installations with FM-200[®]. This product is not designed for other use or purpose. If product user has any doubt regarding the application or product use, please contact +34 947 28 11 08. Every not approved use or application or / and any other not approved modification of the product or its function may cause serious accidents or / and personal damages. SIEX 2001 S.L. is not responsible for any non-approved use of the application.

IMPORTANT: SIEX 2001 S.L. reserves the right to change or modify without previous notice any data or specification due to changes or modification in order to improve the products presented.

FM-200[®] is a registered Trademark of DuPont used under license by SIEX 2001 S. L